



CNC pipe bending machine

TUBOTRON 30

TUBOTRON 30

Features / Equipment


- programmable sequence control with menu-driven user guidance via SIMATIC Touch PC on mobile control board
- exposed and compact bending head for maximum bending space
- hydraulic bending drive
- hydraulic pipe clamping (power programmable)
- hydraulic pressure die positioning
- hydraulic long-neck collet chuck allows for positioning of the pipe in the pressure die area, with pipe re-gripping functionality
- hydraulic and anticipated mandrel retraction
- automatic minimum quantity mandrel lubrication
- pipe and mandrel support
- interface for remote maintenance
- oil cooler

Options


- follower-type pressure die
- anti-buckling system for the mandrel rod
- centralized lubrication system

Models

- pipe length (over mandrel): 3000 mm / 4500 mm / 6000 mm

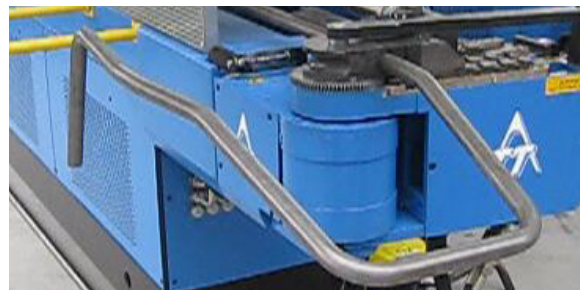

Fully automatic and highly precise bending of pipes up to Ø 30 mm.

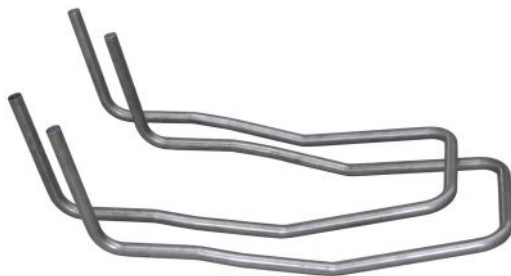

Application example: framework made of mild steel pipes Ø 30.0 x 1.5 mm

Technical data

bending capability (mild steel)	Ø 30.0 x 4.0 mm
max. bending radius ¹⁾	200 mm
bending speed (max.)	140 °/s
pipe feed (max.)	1670 mm/s
pipe rotation (max.)	360 °/s
positioning accuracy	± 0.05 mm / ± 0.05 °
dimensions, approx. (LxWxH) ²⁾	4700 x 900 x 1200 mm
weight, approx. ²⁾	1900 kg
connected load	15.0 kW

¹⁾ depends on the pipe diameter

²⁾ at min. pipe length

Photos, text and illustrations are subject to change.
© TRACTO-TECHNIK GmbH & Co.KG. 2012-09.